

CHENXI

OUTDOOR PRODUCTS

2024 CATALOG

DOT SIGHT

Model	RD-21001
Magnification	1X
Reflex Lens Coating:	Red Film
Clear Aperture:	19.50mm
Light Transmission:	70%
Dot Size:	2 moa-5 moa
Click Value:	1 moa
W/E Adjustment Range:	≥ 45 moa (Up, down, right & left)
Parallax:	≤ 2 moa
Free Parallax Setting:	50 or 100 Yards
Brightness Setting:	10 settings; Push & hold 3 seconds to shot down; Power off memory
Battery Model:	CR2032
Battery Life:	≥ 5000 hours @ middle setting
Operation Temperature Range:	-20°C~+60°C/-4°F~+140°F
Water Proof:	Yes
Shock Proof:	Yes
Fogging Proof:	Yes



RD-21001



RD-20000

Model	RD-20000
Magnification	1x
Reflex Lens Coating:	Red Film
Clear Aperture:	20mm
Light Transmission:	≥70%
Dot Size:	2moa
Click Value:	1moa
W/E Adjustment Range:	>120moa
Parallax:	≤2moa
Parallax Free Setting:	50 or 100yard
Brightness Setting:	6 settings
Battery Model:	AAA Battery (Not included)
Extra Solar Panel:	Yes
Mounting System:	Picatinny/Weaver
Water Proof:	Yes
Fogging Proof:	Yes
Shock Proof:	Yes

Model	RD-21002
Magnification	1x
Reflex Lens Coating:	Red Film
Clear Aperture:	21mm
Light Transmission:	≥70%
Dot Size:	2moa
Click Value:	1moa
W/E Adjustment Range:	>120moa
Parallax:	≤2moa
Parallax Free Setting:	50 or 100yard
Brightness Setting:	Red & Green(5 settings each)
Battery Model:	CR2032
Extra Solar Panel:	No
Mounting System:	Picatinny/Weaver
Water Proof:	Yes
Fogging Proof:	Yes
Shock Proof:	Yes



Model	RD-21003
Magnification	1x
Reflex Lens Coating:	Red Film
Clear Aperture:	21mm
Light Transmission:	≥70%
Dot Size:	2moa
Click Value:	1moa
W/E Adjustment Range:	>120moa
Parallax:	≤2moa
Parallax Free Setting:	50 or 100yard
Brightness Setting:	12 settings
Battery Model:	CR2032
Extra Solar Panel:	No
Mounting System:	Picatinny/Weaver
Water Proof:	Yes
Fogging Proof:	Yes
Shock Proof:	Yes

Model	RD-21004
Magnification	1x
Reflex Lens Coating:	Red Film
Clear Aperture:	21mm
Light Transmission:	≥70%
Dot Size:	2moa
Click Value:	1moa
W/E Adjustment Range:	>120moa
Parallax:	≤2moa
Parallax Free Setting:	50 or 100yard
Brightness Setting:	12 settings
Battery Model:	CR2032
Extra Solar Panel:	No
Mounting System:	Picatinny/Weaver
Water Proof:	Yes
Fogging Proof:	Yes
Shock Proof:	Yes



Model	RD-25001
Magnification	1X
Reflex Lens Coating:	Red Film
Clear Aperture:	23.50mm
Light Transmission:	70%
Dot Size:	2 moa-5 moa
Click Value:	1 moa
W/E Adjustment Range:	≥ 45 moa (Up, down, right & left)
Parallax:	≤ 2 moa
Free Parallax Setting:	50 or 100 Yards
Brightness Setting:	10 settings; Push & hold 3 seconds to shot down; Power off memory
Battery Model:	CR2032
Battery Life:	≥ 5000 hours @ middle setting
Operation Temperature Range:	-20°C~+60°C/-4°F~+140°F
Water Proof:	Yes
Shock Proof:	Yes
Fogging Proof:	Yes



RD-25001



RD-29001



Model	RD-29001
Magnification	1X
Reflex Lens Coating:	Red Film
Clear Aperture:	27.00mm
Light Transmission:	70%
Dot Size:	2 moa-5 moa
Click Value:	0.5 moa
W/E Adjustment Range:	≥ 45 moa (Up, down, right & left)
Parallax:	≤ 2 moa
Free Parallax Setting:	50 or 100 Yards
Brightness Setting:	10 settings; Push & hold 3 seconds to shot down; Power off memory
Battery Model:	CR2032
Battery Life:	≥ 2000 hours @ middle setting
Operation Temperature Range:	-20°C~+60°C/-4°F~+140°F
Water Proof:	Yes
Shock Proof:	Yes
Fogging Proof:	Yes

Model	RX-1002
Magnification	1X
Reflex Lens Coating:	Red Film
Window Size:	24 x 17mm
Light Transmission:	70%
Dot Size:	3 moa
Click Value:	x
W/E Adjustment Range:	≥ 45 moa (Up, down, right & left)
Parallax:	≤ 2 moa
Free Parallax Setting:	50 or 100 Yards
Brightness Setting:	10 settings; Push & hold 3 seconds to shot down; Power off memory
Battery Model:	CR2032
Battery Life:	≥ 2000hours @ middle setting
Operation Temperature Range:	-20°C~+60°C/-4°F~+140°F
Water Proof:	Yes
Shock Proof:	Yes
Fogging Proof:	Yes



RX-1002




RX-1001

Model	RX-1001
Magnification	1X
Reflex Lens Coating:	Red Film
Window Size:	24 x 17mm
Light Transmission:	70%
Dot Size:	3 moa-5 moa
Click Value:	x
W/E Adjustment Range:	≥ 45 moa (Up, down, right & left)
Parallax:	≤ 2 moa
Free Parallax Setting:	50 or 100 Yards
Brightness Setting:	10 settings; Push & hold 3 seconds to shot down; Power off memory
Battery Model:	CR2032
Battery Life:	≥ 2000hours @ middle setting
Operation Temperature Range:	-20°C~+60°C/-4°F~+140°F
Water Proof:	Yes
Shock Proof:	Yes
Fogging Proof:	Yes


Model	RX-1003
Magnification	1X
Reflex Lens Coating:	Red Film
Window Size:	20 x 16.50mm
Light Light Transmission:	85%
Dot Size:	2 moa
Click Value:	x
W/E Adjustment Range:	≥ 45 moa (Up, down, right & left)
Parallax:	≤ 1.5 moa
Free Parallax Setting:	50 or 100 Yards
Brightness Setting:	10 settings; Push & hold 3 seconds to shot down; Power off memory
Battery Model:	CR2032
Battery Life:	High-light:50 hours,Low-light:500 hours
Operation Temperature Range:	-20°C~+60°C/-4°F~+140°F
Water Proof:	Yes
Shock Proof:	Yes
Fogging Proof:	Yes



RX-1003

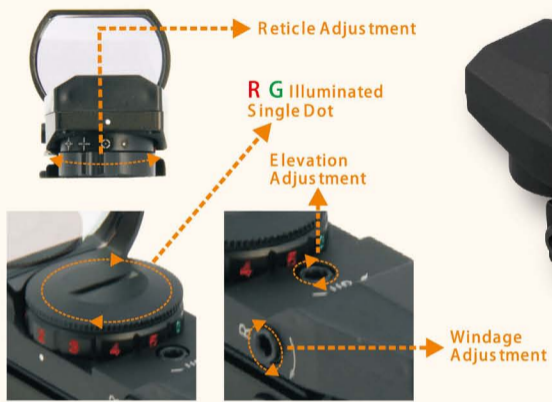

RD-0004



RL-0001R

Model	RD-0004	RL-0001R
Magnification	1x	1x
Objective Lens Dia.	35x24mm	33mm
Net Weight	117g	198g
Length	83mm	85mm
Eye Relief	unlimited	unlimited
Material	Aluminum	Aluminum
Battery	CR2032	CR2032

