



***CHENXI***

OUTDOOR PRODUCTS

**2025-2026 CATALOG**

# DOT SIGHT

|                              |                                                                   |
|------------------------------|-------------------------------------------------------------------|
| Model                        | RD-21001                                                          |
| Magnification                | 1X                                                                |
| Reflex Lens Coating:         | Red Film                                                          |
| Clear Aperture:              | 19.50mm                                                           |
| Light Transmission:          | 70%                                                               |
| Dot Size:                    | 2 moa-5 moa                                                       |
| Click Value:                 | 1 moa                                                             |
| W/E Adjustment Range:        | ≥ 45 moa ( Up, down, right & left )                               |
| Parallax:                    | ≤ 2 moa                                                           |
| Free Parallax Setting:       | 50 or 100 Yards                                                   |
| Brightness Setting:          | 10 settings; Push & hold 3 seconds to shot down; Power off memory |
| Battery Model:               | CR2032                                                            |
| Battery Life:                | ≥ 5000 hours @ middle setting                                     |
| Operation Temperature Range: | -20°C~-+60°C/-4°F~+140°F                                          |
| Water Proof:                 | Yes                                                               |
| Shock Proof:                 | Yes                                                               |
| Fogging Proof:               | Yes                                                               |



RD-21001



RD-20000

|                        |                              |
|------------------------|------------------------------|
| Model                  | RD-20000                     |
| Magnification          | 1x                           |
| Reflex Lens Coating:   | Red Film                     |
| Clear Aperture:        | 20mm                         |
| Light Transmission:    | ≥70%                         |
| Dot Size:              | 2moa                         |
| Click Value:           | 1moa                         |
| W/E Adjustment Range:  | >120moa                      |
| Parallax:              | ≤2moa                        |
| Parallax Free Setting: | 50 or 100yard                |
| Brightness Setting:    | 6 settings                   |
| Battery Model:         | AAA Battery ( Not included ) |
| Extra Solar Panel:     | Yes                          |
| Mounting System:       | Picatinny/Weaver             |
| Water Proof:           | Yes                          |
| Fogging Proof:         | Yes                          |
| Shock Proof:           | Yes                          |

|                        |                              |
|------------------------|------------------------------|
| Model                  | RD-21002                     |
| Magnification          | 1x                           |
| Reflex Lens Coating:   | Red Film                     |
| Clear Aperture:        | 21mm                         |
| Light Transmission:    | ≥70%                         |
| Dot Size:              | 2moa                         |
| Click Value:           | 1moa                         |
| W/E Adjustment Range:  | >120moa                      |
| Parallax:              | ≤2moa                        |
| Parallax Free Setting: | 50 or 100yard                |
| Brightness Setting:    | Red & Green(5 settings each) |
| Battery Model:         | CR2032                       |
| Extra Solar Panel:     | No                           |
| Mounting System:       | Picatinny/Weaver             |
| Water Proof:           | Yes                          |
| Fogging Proof:         | Yes                          |
| Shock Proof:           | Yes                          |



|                        |                  |
|------------------------|------------------|
| Model                  | RD-21003         |
| Magnification          | 1x               |
| Reflex Lens Coating:   | Red Film         |
| Clear Aperture:        | 21mm             |
| Light Transmission:    | ≥70%             |
| Dot Size:              | 2moa             |
| Click Value:           | 1moa             |
| W/E Adjustment Range:  | >120moa          |
| Parallax:              | ≤2moa            |
| Parallax Free Setting: | 50 or 100yard    |
| Brightness Setting:    | 12 settings      |
| Battery Model:         | CR2032           |
| Extra Solar Panel:     | No               |
| Mounting System:       | Picatinny/Weaver |
| Water Proof:           | Yes              |
| Fogging Proof:         | Yes              |
| Shock Proof:           | Yes              |

|                        |                  |
|------------------------|------------------|
| Model                  | RD-21004         |
| Magnification          | 1x               |
| Reflex Lens Coating:   | Red Film         |
| Clear Aperture:        | 21mm             |
| Light Transmission:    | ≥70%             |
| Dot Size:              | 2moa             |
| Click Value:           | 1moa             |
| W/E Adjustment Range:  | >120moa          |
| Parallax:              | ≤2moa            |
| Parallax Free Setting: | 50 or 100yard    |
| Brightness Setting:    | 12 settings      |
| Battery Model:         | CR2032           |
| Extra Solar Panel:     | No               |
| Mounting System:       | Picatinny/Weaver |
| Water Proof:           | Yes              |
| Fogging Proof:         | Yes              |
| Shock Proof:           | Yes              |



|                              |                                                                   |
|------------------------------|-------------------------------------------------------------------|
| Model                        | RD-25001                                                          |
| Magnification                | 1X                                                                |
| Reflex Lens Coating:         | Red Film                                                          |
| Clear Aperture:              | 23.50mm                                                           |
| Light Transmission:          | 70%                                                               |
| Dot Size:                    | 2 moa-5 moa                                                       |
| Click Value:                 | 1 moa                                                             |
| W/E Adjustment Range:        | ≥ 45 moa ( Up, down, right & left )                               |
| Parallax:                    | ≤ 2 moa                                                           |
| Free Parallax Setting:       | 50 or 100 Yards                                                   |
| Brightness Setting:          | 10 settings; Push & hold 3 seconds to shot down; Power off memory |
| Battery Model:               | CR2032                                                            |
| Battery Life:                | ≥ 5000 hours @ middle setting                                     |
| Operation Temperature Range: | -20°C~+60°C/-4°F~+140°F                                           |
| Water Proof:                 | Yes                                                               |
| Shock Proof:                 | Yes                                                               |
| Fogging Proof:               | Yes                                                               |



RD-25001



RD-29001



|                              |                                                                   |
|------------------------------|-------------------------------------------------------------------|
| Model                        | RD-29001                                                          |
| Magnification                | 1X                                                                |
| Reflex Lens Coating:         | Red Film                                                          |
| Clear Aperture:              | 27.00mm                                                           |
| Light Transmission:          | 70%                                                               |
| Dot Size:                    | 2 moa-5 moa                                                       |
| Click Value:                 | 0.5 moa                                                           |
| W/E Adjustment Range:        | ≥ 45 moa ( Up, down, right & left )                               |
| Parallax:                    | ≤ 2 moa                                                           |
| Free Parallax Setting:       | 50 or 100 Yards                                                   |
| Brightness Setting:          | 10 settings; Push & hold 3 seconds to shot down; Power off memory |
| Battery Model:               | CR2032                                                            |
| Battery Life:                | ≥ 2000 hours @ middle setting                                     |
| Operation Temperature Range: | -20°C~+60°C/-4°F~+140°F                                           |
| Water Proof:                 | Yes                                                               |
| Shock Proof:                 | Yes                                                               |
| Fogging Proof:               | Yes                                                               |

|                              |                                                                   |
|------------------------------|-------------------------------------------------------------------|
| Model                        | RX-1002                                                           |
| Magnification                | 1X                                                                |
| Reflex Lens Coating:         | Red Film                                                          |
| Window Size:                 | 24 x 17mm                                                         |
| Light Transmission:          | 70%                                                               |
| Dot Size:                    | 3 moa                                                             |
| Click Value:                 | x                                                                 |
| W/E Adjustment Range:        | ≥ 45 moa ( Up, down, right & left )                               |
| Parallax:                    | ≤ 2 moa                                                           |
| Free Parallax Setting:       | 50 or 100 Yards                                                   |
| Brightness Setting:          | 10 settings; Push & hold 3 seconds to shot down; Power off memory |
| Battery Model:               | CR2032                                                            |
| Battery Life:                | ≥ 2000hours @ middle setting                                      |
| Operation Temperature Range: | -20°C~+60°C/-4°F~+140°F                                           |
| Water Proof:                 | Yes                                                               |
| Shock Proof:                 | Yes                                                               |
| Fogging Proof:               | Yes                                                               |



**RX-1002**




**RX-1001**

|                              |                                                                   |
|------------------------------|-------------------------------------------------------------------|
| Model                        | RX-1001                                                           |
| Magnification                | 1X                                                                |
| Reflex Lens Coating:         | Red Film                                                          |
| Window Size:                 | 24 x 17mm                                                         |
| Light Transmission:          | 70%                                                               |
| Dot Size:                    | 3 moa-5 moa                                                       |
| Click Value:                 | x                                                                 |
| W/E Adjustment Range:        | ≥ 45 moa ( Up, down, right & left )                               |
| Parallax:                    | ≤ 2 moa                                                           |
| Free Parallax Setting:       | 50 or 100 Yards                                                   |
| Brightness Setting:          | 10 settings; Push & hold 3 seconds to shot down; Power off memory |
| Battery Model:               | CR2032                                                            |
| Battery Life:                | ≥ 2000hours @ middle setting                                      |
| Operation Temperature Range: | -20°C~+60°C/-4°F~+140°F                                           |
| Water Proof:                 | Yes                                                               |
| Shock Proof:                 | Yes                                                               |
| Fogging Proof:               | Yes                                                               |


|                              |                                                                   |
|------------------------------|-------------------------------------------------------------------|
| Model                        | RX-1003                                                           |
| Magnification                | 1X                                                                |
| Reflex Lens Coating:         | Red Film                                                          |
| Window Size:                 | 20 x 16.50mm                                                      |
| Light Light Transmission:    | 85%                                                               |
| Dot Size:                    | 2 moa                                                             |
| Click Value:                 | x                                                                 |
| W/E Adjustment Range:        | ≥ 45 moa ( Up, down, right & left )                               |
| Parallax:                    | ≤ 1.5 moa                                                         |
| Free Parallax Setting:       | 50 or 100 Yards                                                   |
| Brightness Setting:          | 10 settings; Push & hold 3 seconds to shot down; Power off memory |
| Battery Model:               | CR2032                                                            |
| Battery Life:                | High-light:50 hours,Low-light:500 hours                           |
| Operation Temperature Range: | -20°C~+60°C/-4°F~+140°F                                           |
| Water Proof:                 | Yes                                                               |
| Shock Proof:                 | Yes                                                               |
| Fogging Proof:               | Yes                                                               |



**RX-1003**

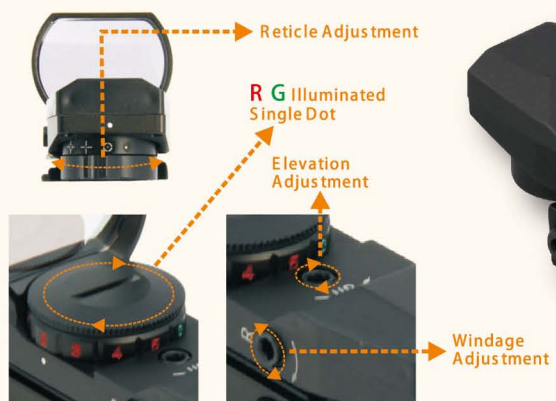

**RD-0004**



**RL-0001R**



Elevation Adjustment

Reticle Adjustment

| Model               | RD-0004   | RL-0001R  |
|---------------------|-----------|-----------|
| Magnification       | 1x        | 1x        |
| Objective Lens Dia. | 35x24mm   | 33mm      |
| Net Weight          | 117g      | 198g      |
| Length              | 83mm      | 85mm      |
| Eye Relief          | unlimited | unlimited |
| Material            | Aluminum  | Aluminum  |
| Battery             | CR2032    | CR2032    |





**CHENXi**

[Http://www.chenxioutdoor.com](http://www.chenxioutdoor.com)

