



**CHENXI**

---

OUTDOOR PRODUCTS

---

**2026-2027 CATALOG**

Model	RD-21001
Magnification	1X
Reflex Lens Coating:	Red Film
Clear Aperture:	19.50mm
Light Transmission:	70%
Dot Size:	2 moa-5 moa
Click Value:	1 moa
W/E Adjustment Range:	≥ 45 moa ( Up, down, right & left )
Parallax:	≤ 2 moa
Free Parallax Setting:	50 or 100 Yards
Brightness Setting:	10 settings; Push & hold 3 seconds to shot down; Power off memory
Battery Model:	CR2032
Battery Life:	≥ 5000 hours @ middle setting
Operation Temperature Range:	-20°C~+60°C/-4°F~+140°F
Water Proof:	Yes
Shock Proof:	Yes
Fogging Proof:	Yes



RD-21001



RD-20000

Model	RD-20000
Magnification	1x
Reflex Lens Coating:	Red Film
Clear Aperture:	20mm
Light Transmission:	≥70%
Dot Size:	2moa
Click Value:	1moa
W/E Adjustment Range:	>120moa
Parallax:	≤2moa
Parallax Free Setting:	50 or 100yard
Brightness Setting:	6 settings
Battery Model:	AAA Battery ( Not included )
Extra Solar Panel:	Yes
Mounting System:	Picatinny/Weaver
Water Proof:	Yes
Fogging Proof:	Yes
Shock Proof:	Yes

D  
O  
T  
S  
I  
G  
H  
T

Model	RD-21002
Magnification	1x
Reflex Lens Coating:	Red Film
Clear Aperture:	21mm
Light Transmission:	≥70%
Dot Size:	2moa
Click Value:	1moa
W/E Adjustment Range:	>120moa
Parallax:	≤2moa
Parallax Free Setting:	50 or 100yard
Brightness Setting:	Red & Green(5 settings each)
Battery Model:	CR2032
Extra Solar Panel:	No
Mounting System:	Picatinny/Weaver
Water Proof:	Yes
Fogging Proof:	Yes
Shock Proof:	Yes



Model	RD-21003
Magnification	1x
Reflex Lens Coating:	Red Film
Clear Aperture:	21mm
Light Transmission:	≥70%
Dot Size:	2moa
Click Value:	1moa
W/E Adjustment Range:	>120moa
Parallax:	≤2moa
Parallax Free Setting:	50 or 100yard
Brightness Setting:	12 settings
Battery Model:	CR2032
Extra Solar Panel:	No
Mounting System:	Picatinny/Weaver
Water Proof:	Yes
Fogging Proof:	Yes
Shock Proof:	Yes

Model	RD-21004
Magnification	1x
Reflex Lens Coating:	Red Film
Clear Aperture:	21mm
Light Transmission:	≥70%
Dot Size:	2moa
Click Value:	1moa
W/E Adjustment Range:	>120moa
Parallax:	≤2moa
Parallax Free Setting:	50 or 100yard
Brightness Setting:	12 settings
Battery Model:	CR2032
Extra Solar Panel:	No
Mounting System:	Picatinny/Weaver
Water Proof:	Yes
Fogging Proof:	Yes
Shock Proof:	Yes



Model	RD-25001
Magnification	1X
Reflex Lens Coating:	Red Film
Clear Aperture:	23.50mm
Light Transmission:	70%
Dot Size:	2 moa-5 moa
Click Value:	1 moa
W/E Adjustment Range:	≥ 45 moa ( Up, down, right & left )
Parallax:	≤ 2 moa
Free Parallax Setting:	50 or 100 Yards
Brightness Setting:	10 settings; Push & hold 3 seconds to shot down; Power off memory
Battery Model:	CR2032
Battery Life:	≥ 5000 hours @ middle setting
Operation Temperature Range:	-20°C~+60°C/-4°F~+140°F
Water Proof:	Yes
Shock Proof:	Yes
Fogging Proof:	Yes



RD-25001



RD-29001

Model	RD-29001
Magnification	1X
Reflex Lens Coating:	Red Film
Clear Aperture:	27.00mm
Light Transmission:	70%
Dot Size:	2 moa-5 moa
Click Value:	0.5 moa
W/E Adjustment Range:	≥ 45 moa ( Up, down, right & left )
Parallax:	≤ 2 moa
Free Parallax Setting:	50 or 100 Yards
Brightness Setting:	10 settings; Push & hold 3 seconds to shot down; Power off memory
Battery Model:	CR2032
Battery Life:	≥ 2000 hours @ middle setting
Operation Temperature Range:	-20°C~+60°C/-4°F~+140°F
Water Proof:	Yes
Shock Proof:	Yes
Fogging Proof:	Yes

Model	RX-1002
Magnification	1X
Reflex Lens Coating:	Red Film
Window Size:	24 x 17mm
Light Transmission:	70%
Dot Size:	3 moa
Click Value:	x
W/E Adjustment Range:	≥ 45 moa ( Up, down, right & left )
Parallax:	≤ 2 moa
Free Parallax Setting:	50 or 100 Yards
Brightness Setting:	10 settings; Push & hold 3 seconds to shot down; Power off memory
Battery Model:	CR2032
Battery Life:	≥ 2000hours @ middle setting
Operation Temperature Range:	-20°C~+60°C/-4°F~+140°F
Water Proof:	Yes
Shock Proof:	Yes
Fogging Proof:	Yes



Model	RX-1003
Magnification	1X
Reflex Lens Coating:	Red Film
Window Size:	20 x 16.50mm
Light Transmission:	85%
Dot Size:	2 moa
Click Value:	x
W/E Adjustment Range:	≥ 45 moa ( Up, down, right & left )
Parallax:	≤ 1.5 moa
Free Parallax Setting:	50 or 100 Yards
Brightness Setting:	10 settings; Push & hold 3 seconds to shot down; Power off memory
Battery Model:	CR2032
Battery Life:	High-light:50 hours,Low-light:500 hours
Operation Temperature Range:	-20°C~+60°C/-4°F~+140°F
Water Proof:	Yes
Shock Proof:	Yes
Fogging Proof:	Yes




Model	RX-1012
Magnification	1X
Reflex Lens Coating	Red Film
Window Size	24 x 20 mm
Light Transmission	90%
Dot Size	3 MOA
Click Value	N/A
W/E Adjustment Range	90 MOA / 90 MOA
Parallax	≤2MOA
Free Parallax Setting	100 yards
Brightness Setting	8 daytime + 2 NV
Mount Base	RMR Base
Battery Model	CR1632. Side load
Battery Life	Low level 50,000 hrs +
Operation Temperature Range	-20°C ~ 40°C (-4°F ~ 104°F)
Water Proof	IPX7 (1M, 30min)
Shock Proof	1000Gs, 300Circles
Fogging Proof	Yes
Shake Awake Function	Yes





Model	RX-1019
Magnification	1X
Reflex Lens Coating	Red Film
Window Size	22mm Diameter
Light Transmission	70%
Dot Size	3-4MOA
Click Value	1MOA
W/E Adjustment Range	±30MOA
Parallax	NO
Free Parallax Setting	50 yards
Brightness Setting	R/7 Levels
Mount Base	N/A
Battery Model	CR2032
Battery Life	N/A
Operation Temperature Range	-40°C~50°C (-40°F ~ 122°F)
Water Proof	Yes
Shock Proof	Yes
Fogging Proof	Yes
Shake Awake Function	No



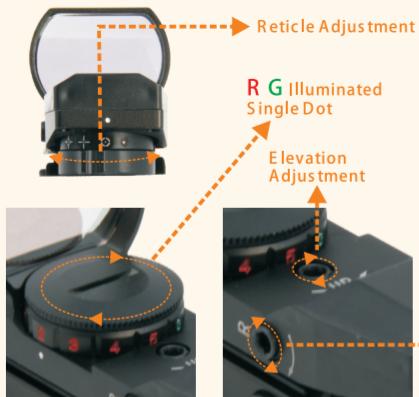

RD-0004



RL-0001R

Model	RD-0004	RL-0001R
Magnification	1x	1x
Objective Lens Dia.	35x24mm	33mm
Net Weight	117g	198g
Length	83mm	85mm
Eye Relief	unlimited	unlimited
Material	Aluminum	Aluminum
Battery	CR2032	CR2032





**CHENXi**★

[www.99outdoor.com](http://www.99outdoor.com)

[www.chenxioutdoor.com](http://www.chenxioutdoor.com)

